shadow-caster®
LED LIGHTING

MARINE LIGHTING & CONTROLS
PRODUCT GUIDE

SCR SERIES

Bronze housing and borosilicate glass window make this light a great all around choice.

- Best in class for brightness, ease of operation and quality
- Ideal for 'Live In The Water' boats
- Proprietary clear gel-filled design
- Scratch resistant, tempered glass lens
- Bronze housing
- IP68 fully submersible waterproof design
- Transient surge and reverse polarity protection
- Thermal throttling technology
- 10-40V input range

shadow-caster®
LED LIGHTING

EXCELLENCE IN LED LIGHTING & CONTROLS

SHADOW-CASTER® LED LIGHTING

Shadow-Caster® specializes in the design and manufacture of a complete range of innovative marine LED lighting products, controls and accessories. All products are manufactured at our facility in Clearwater, Florida USA. We pride ourselves on our superior customer support, making us the clear choice for lighting products that are exceptionally bright, robust and efficient.

We have relationships with major marine electronic manufacturers, including Garmin, Raymarine, Furuno, Simrad, Lowrance, B&G, and Humminbird to offer integrated solutions to provide seamless and easy to use marine lighting control interfaces.

OUR STORY

The founders of Shadow-Caster are driven to bring products to the marketplace that deliver high performance and reliability. Their devotion to the boating community drives constant evolution and improvements to the Shadow-Caster® product line. This continual improvement sets Shadow-Caster® Lighting above the rest.

At Shadow-Caster we strive to innovate beyond the standard LED light. Over the last few years, our Shadow-NET® technology has continuously evolved and today you will find products utilizing our unique lighting protocol integrated across many boat manufacturers. Shadow-NET® delivers on our vision to provide customers with integrated lighting control for an entire boat.

4"
[101.6mm]

0.66"
[16.8mm]

SCR-24
- Up to 10,000 lumens
- 120° beam angle
- 90 watts power draw
- 12 built-in colors (CC model without external controller)
- Unlimited colors enabled with Shadow-NET® (RGB-CC model only)

LED colors:

RGB   BW   BB   AG   GW
CC

shadow-net®
TECHNOLOGY
ENABLED

4"
[101.6mm]

0.66"
[16.8mm]

SCR-16
- Up to 7,000 lumens
- 120° beam angle
- 60 watts power draw
- Built-in color control (BW model)
- Built-in dimming (single color models)

LED colors:

BW   BB   AG   GW   UB   CR

UNDERWATER LIGHTS

SC3 SERIES

Our 3" underwater light series for mid-size boats and space constrained applications.

- Bronze housing with 3.4" diameter and tempered glass window
- Ideal for 'Live In The Water' boats
- Clear gel-filled design
- 24 watts, 3000 lumen output
- IP68 fully submersible waterproof design

SC3 PONTOON

A light designed specifically for bracket mounting on pontoon boats.

- Rear bolt design provides a sleek mounting profile
- Hard anodized aluminum housing with glass window
- IP68 fully submersible waterproof design

SC2 SERIES

Our newest underwater light series for smaller and more cost sensitive application provide your vessel with 24 watts of intense LED lighting.

The SC2's are designed with a sub-compact 2.99" diameter composite or bronze housing for under the waterline surface mounting.

- Bronze or composite housing with 2.99" diameter and tempered glass window
- Ideal for 'Live In The Water' boats
- Clear gel-filled design
- 24 watts, 3000 lumen output
- IP68 fully submersible waterproof design

3.4"
[84mm]

0.8"
[20.3mm]

SC3-BZSM

- Economical cost option
- Bronze housing
- Borosilicate glass window
- Up to 3,000 lumens
- Surface mount
- 2A current draw at 12V
- 10-30V input range
- Built in Color Control (RGB-CC model only)
- Unlimited colors enabled with Shadow-NET® (RGB-CC model only)

LED colors:

RGB CC   BW   BB   GW

Shadow-net TECHNOLOGY
ENABLED

2.99"
[75.9mm]

0.58"
[14.8mm]

SC2-BZSM

- Economical cost option
- Bronze housing
- Borosilicate glass window
- Up to 3,000 lumens
- Surface mount
- 2A current draw at 12V
- 10-30V input range
- Built in Color Control (RGB-CC model only)
- Unlimited colors enabled with Shadow-NET® (RGB-CC model only)

LED colors:

RGB   BB   GW

Shadow-net TECHNOLOGY
ENABLED

3.4"
[76mm]

0.6"
[15.2mm]

SC3-ALTB PONTOON LIGHT

- RGB version requires controller
- Hard anodized aluminum housing
- Up to 3,000 lumens
- Bracket mount
- Passive RGB design
- 3A max current draw (RGB)
- 1.4A current draw (single color)
- 12V input only

LED colors:

RGB   BB   GW

2.99"
[75.9mm]

0.58"
[14.8mm]

SC2-CSM

- Economical cost option
- Composite housing
- Up to 3,000 lumens
- Surface mount
- 2A current draw at 12V
- 10-30V input range
- Built in Color Control (RGB-CC model only)
- Unlimited colors enabled with Shadow-NET® (RGB-CC model only)

LED colors:

RGB   BB   GW

*Shadow-net* TECHNOLOGY
ENABLED

UNDERWATER LIGHTS

SCM SERIES

Low profile design, high brightness and stainless steel housing make this light a great choice for trailer and lift kept boats.

- Proprietary clear gel-filled design
- Tough, polycarbonate lens
- Corrosion resistant passivated stainless steel 316 housing
- IP68 fully submersible waterproof design
- Transient surge and reverse polarity protection
- Thermal throttling technology
- 10-40V input range

10" [254mm]

2.4" [61mm]
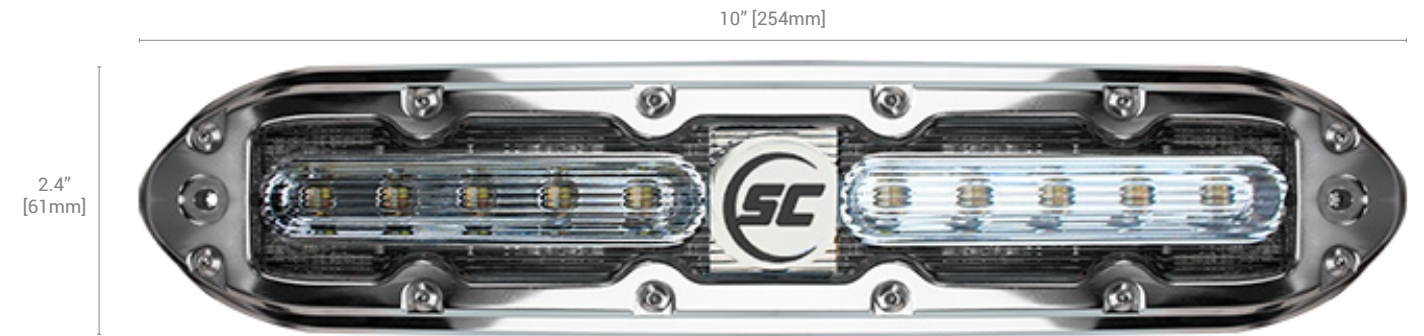
SCM-10
- 10 single color LEDs
- Up to 4,000 lumens
- 120° beam angle
- 42W power draw

LED colors:
BB   GW   AG   CR   UB

10" [254mm]

2.4" [61mm]

SCM-10-EXT-CC
- 10 RGBW LEDs
- Up to 4,000 lumens
- 120° beam angle
- 42W power draw

LED colors:
RGBW CC

shadow-net TECHNOLOGY
ENABLED

SCM-6
- 6 single color LEDs
- Up to 2,400 lumens
- 120° beam angle
- 24W power draw

LED colors:
BB   GW   AG   CR   UB

7.2" [182.9mm]

2.4" [61mm]

SCM SERIES ULTRA-LOW PROFILE DESIGN

0.5" [12.7mm]
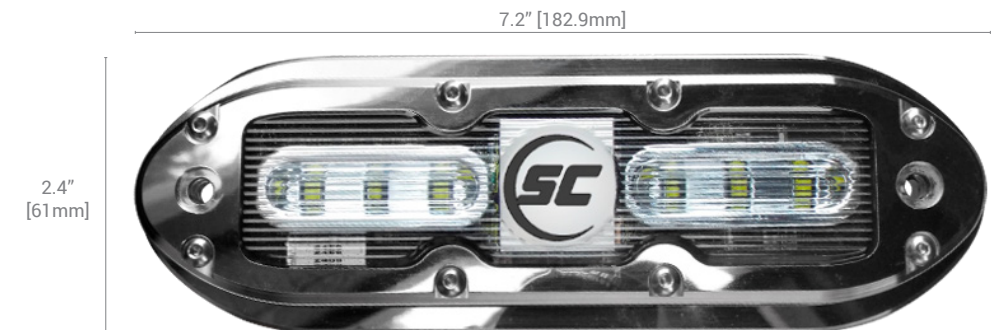
SCM-4
- 4 single color LEDs
- Up to 1,600 lumens
- 120° beam angle
- 16W power draw

LED colors:
BB   GW   AG   CR   UB

5.8" [147.3mm]

2.4" [61mm]
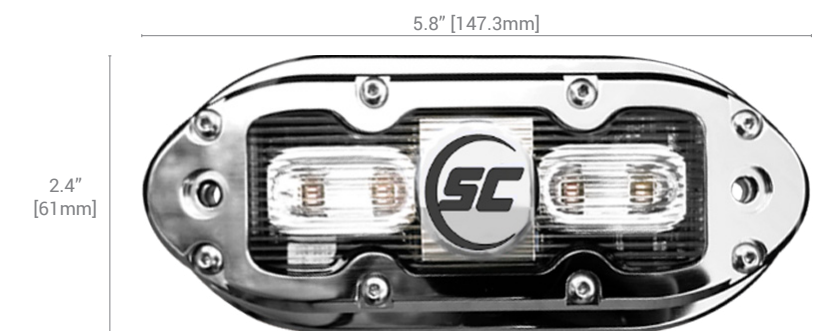
ABOVE WATER LIGHTS

COURTESY LIGHTS

Low profile design great for lighting accent areas, hatches, steps and baitwells.

Our edge emitting CL series is available in two finishes: polished stainless steel or UV resistant ABS with a black and white cover included.

CLX and CL10 models have a front facing LED for wide-angle, low-glare illumination.

DOWN LIGHTS

Overhead lighting for your vessel. Ideal for T-tops and interior areas.

- White, black or chrome finish to match your boat aesthetics
- DLX version is 3" outside diameter with all glass reveal
- DL version is 2" outside diameter
- 10-30V input range

SCM-CL / SCM-CL-SS
- Edge emitting LED lights
- 110° viewing angle for single lights and 130° for color changing lights
- Up to 70 lumens light output
- 40,000 hour LED lifetime
- 12/24V compatible
- 60mA (single color)
- 120mA max (RGB)
- IP67 water resistant design
- 3" x 0.8 x 0.2" [76.2 x 19.8 x 5.1mm]

LED colors:

RGB BW BB GW CR

SCM-CLX
- Front facing LED illumination
- 160° viewing angle with low glare
- True white channel for functional use
- Up to 80 lumens of white light output
- 40,000 hour LED lifetime
- 12V compatible
- 300mA max (RGBW)
- Stainless steel 316 polished cover
- IP67 water resistant design
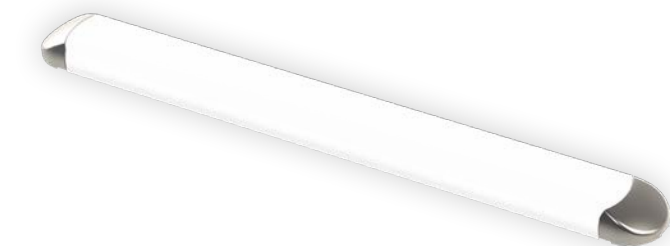- 3" x 1" x 0.32" [76.2 x 25.4 x 8.13mm]

LED colors: RGBW

SCM-CL10
- Large front facing LED illumination
- 160° viewing angle with low glare
- True white channel for functional use
- Up to 250 lumens of white light output
- 40,000 hour LED lifetime
- 12V compatible
- 1A max (RGBW)
- Stainless steel 316 polished end covers
- IP67 water resistant design
- 10" x 1" x 0.6" [257.2 x 25.6mm x 16mm]

LED colors: RGBW

SCM-DLX
- Supports dimming
- 300 lumens
- 120° beam angle
- 3W power draw
- IP67 water resistant design
- Shadow-NET® Enabled (RGBW-CC model)

- 3" [76.2mm] outside diameter
- 0.175" [4.5mm] mounting height
- 2" [50.8mm] mounting hole

LED colors: RGBW WBR GW

LED colors: RGBW

Chrome window models

shadow-net TECHNOLOGY ENABLED

SCM-DLXS
- A simple lower cost Down Light option
- 300 lumens
- 120° beam angle
- 3W power draw
- IP67 water resistant design

- 3" [76.2mm] outside diameter
- 0.175" [4.5mm] mounting height
- 2" [50.8mm] mounting hole

LED colors: BB WW CW

SCM-DL
- Supports dimming
- 300 lumens
- 120° beam angle
- 3W power draw
- IP67 water resistant design
- Shadow-NET® Enabled (RGBW-CC model)

- 2" [50.8mm] outside diameter
- 0.175" [4.5mm] mounting height
- 2" [50.8mm] mounting hole

LED colors: RGBW WBR GW

LED colors: RGBW WBR GW

shadow-net TECHNOLOGY ENABLED

ABOVE WATER LIGHTS

SPREADER LIGHTS

Ideal choice for lighting large deck areas of your vessel.

- Flush mount version ideal for mounting in T-Tops
- Bracket mount version is ideal for retrofit in existing installations
- White or black finish available
- Durable glass lens
- IP67 water resistant design
- 10-30V input range

EAGLE RAY LIGHT BAR

The Shadow-Caster® Eagle Ray allows you to light up the intercoastal waterway and easily see other boaters and navigational markers at night.

With its sleek and adjustable design, you can control power and brightness from either a simple push button switch or Shadow-Caster® Light Commander.

The Eagle Ray Light Bar has a combination of focused beams for long distance viewing and a 30° beam angle to efficiently light your way.

5" [127mm]
1.7" [43.2mm]

SCM-SLF-WH Flush Mount
LED colors: RGBW WBR GW
CC

5" [127mm]
1.7" [43.2mm]

SCM-SLF-BK Flush Mount
LED colors: RGBW WBR GW
CC

4.25" [108mm]
1.6" [40.6mm]

SCM-SLB-WH Bracket Mount
LED colors: RGBW WBR GW
CC

4.25" [108mm]
1.6" [40.6mm]

SCM-SLB-BK Bracket Mount
LED colors: RGBW WBR GW
CC

SCM-SL SERIES
- Low-profile aluminum housing
- 2,200 lumens
- 60° beam angle
- 24W power draw
- IP67 water resistant design
- Flush mount model includes snap-on mounting trim
- 1.6" mounting depth (flush mount)
- 2.8" mounting depth (bracket mount)
- Shadow-NET® Enabled (RGBW-CC model)

shadow-net® TECHNOLOGY ENABLED

4.25" [108mm]
1.6" [40.6mm]

SCM-SLB4X-WH Bracket Mount
LED colors: GW

5" [127mm]
1.7" [43.2mm]

SCM-SLF4X-WH Flush Mount
LED colors: GW

SCM-SL4X SERIES
- 4 High Output LEDs
- 3,000 lumens
- 30° beam angle
- 24W power draw
- IP67 water resistant design
- 1.6" mounting depth (flush mount)
- 2.8" mounting depth (bracket mount)

shadow-net® TECHNOLOGY ENABLED

EAGLE RAY
- High Brightness Light Bar
- Dimmable
- 20,000 lumens
- 30° flood / 3-50° adjustable beams
- Combination low angle beam and flood pattern
- 6500K color temperature
- Backlit logo and illumination for modern look
- Unique electrical design for remote power control allows for easy installation

- Includes adjustable pedestal mount, and optional end bracket mounting locations
- Shadow-NET® Enabled
- Borosilicate glass window
- IP67 water resistant design
- 10-30V input
- 18A current draw at 12V DC
- 2.6" H x 20" W x 5.5" D [65.3 x 506.5 x 136.9mm]
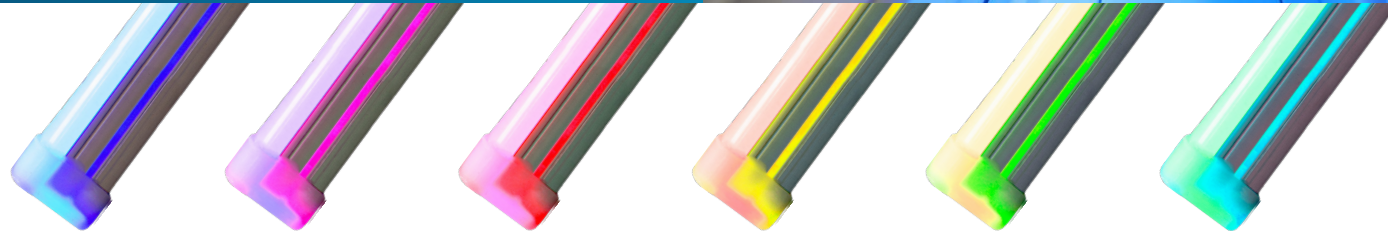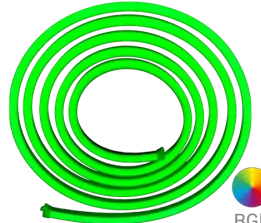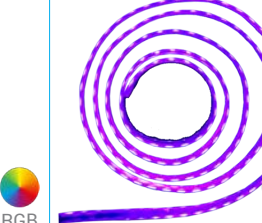
shadow-net® TECHNOLOGY ENABLED

ABOVE WATER LIGHTS

ACCENT STRIP LIGHTS

Shadow-Caster® Accent Strip Lights provide color changing RGB lighting for accent areas, hatches, steps, coves, shelves and compartments.

The SCM-AL-LED marine LED light strip is ideal for mounting out of direct view while the SCM-AL-NEON & SCM-AL-MINI-NEON versions are recommended where the strip will be directly visible, as they have an integrated light diffuser to create a pleasant, continuous lighting look.
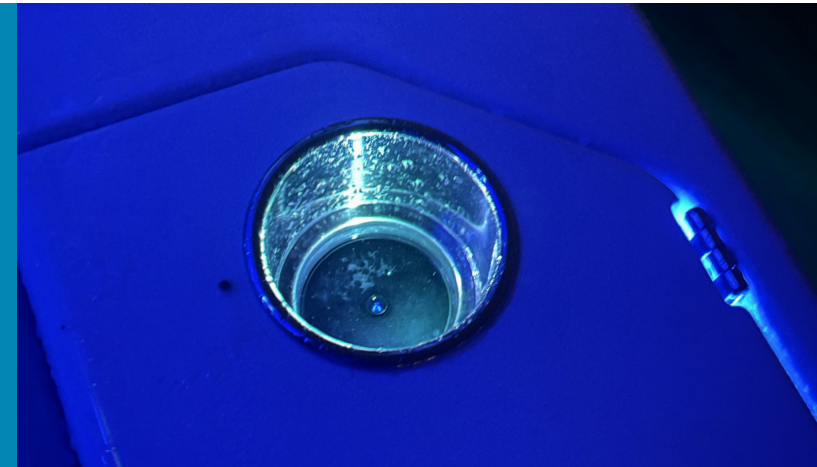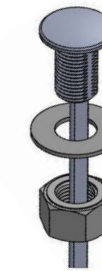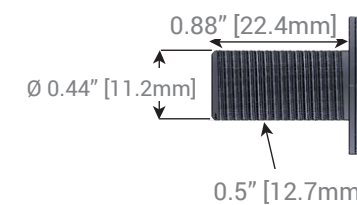
ROUND ACCENT LIGHTS

The SCM-RAL series offer bright accent lighting in a compact and low power draw design.
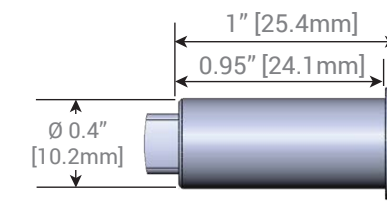
The RAL series are IP68 rated making them great for illuminating baitwells, hatches, cupholders, toe kicks and highlighting smaller areas of your vessel.
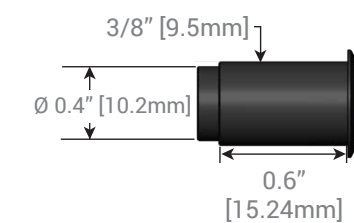
SCM-RAL-RGB-0.5

0.88" [22.4mm] | 0.7m
Ø 0.44" [11.2mm]
0.5" [12.7mm]
Ø 0.88" [20.3mm]

SCM-RAL-RGB-0.4-PW

1" [25.4mm]
0.95" [24.1mm]
Ø 0.4" [10.2mm]
0.6in 15.1mm
Ø 0.5" [12.7mm]

SCM-RAL-RGB-0.4-AB

3/8" [9.5mm]
Ø 0.4" [10.2mm]
0.6" [15.24mm]
Ø 0.5" [12.7mm]

	SCM-AL-NEON	SCM-AL-MINI-NEON	SCM-AL-SV-MINI-NEON	SCM-AL-LED
	RGB	RGB	RGB	RGB
Type	Neon RGB	Neon RGB (smaller bend radius than SCM-AL-NEON)	Side Illuminated Neon RGB (smaller bend radius than SCM-AL-NEON)	LED RGB
Installation	Ideal for installing where strip will be visible			Ideal for installing out of 'line-of-sight'
Illumination	Diffuse RGB color			RGB Color
Lengths & Voltage	8ft, 16ft (12V)	2ft, 4ft, 8ft, 16ft (12V)	8ft, 16ft & 30ft (12V)	8ft, 16ft, 20ft, 24ft (12V) 16ft (24V)
Cut Lengths	Cut to length in ¼" (31.25 mm) increments	Cut to length in 1" (2.5cm) increments	Cut to length in 1" (2.5cm) increments	Cut to length in 2" (5cm) increments
Waterproof	IP67 waterproof design			
Cross Section	0.5" x 0.8" [12.7 x 20.3mm]	0.4" x 0.4" [10.2 x 10.2mm]	0.2" x 0.5" [5.1mm x 12.7mm]	0.2" x 0.5" [5.1mm x 12.7mm]
Bend Direction				
Mounting Track	See Accessories on page 23 for available Mounting Track options			

	SCM-RAL-RGB-0.5	SCM-RAL-GW-0.5	SCM-RAL-RGB-0.4-PW	SCM-RAL-RGB-0.4-AB	SCM-RAL-GW-0.4-AB
Description	Clear plastic bright light		Diffused plastic low profile	Black aluminum with clear lens	
Recommended Use	Baitwells, hatches and courtesy lighting		Hatches, map lighting and small spaces	Cup holders and panel mount instrument lighting	
IP Rating	IP68		IP67	IP65	
Voltage/Current	12V/30ma		12V/20ma	12V/20ma	
Opening	1/2" [12.7mm]		3/8" [9.5mm]	3/8" [9.5mm]	
LED Color	RGB	GW	RGB	RGB	GW

DIGITAL LIGHT STRIPS

SCM-DAL

Add another dimension to your lighting project with Shadow-Caster® Digital Accent Light Strips.

Our Digital Accent Light LED strips allow each LED to provide a different color and brightness, enabling colors to scroll, to simulate motion effects, and other fun patterns.

Available in a diffuse neon and traditional accent LED models.

Couple the strips with the Digital LED Controller (SCM-DLC), when used with our Light Commander series controllers.

SCM-DAL-MINI-NEON
- Neon RGB
- Diffuse RGB color
- Ideal for installing where strip will be visible
- 16ft length
- 3 LEDs per segment
- "WS" one wire communications
- Cut to length in 1" (25mm) increments
- IP67 water resistant design
- 12V only
- 0.4" x 0.4" [10.2 x 10.2mm]
- Mounting track available

SCM-DAL-LED
- LED RGB
- RGB color
- Ideal for installing out of 'line-of-sight'
- 16ft length
- 1 LED per segment
- Black background LED board
- Cut to length in 0.75" (19mm) increments
- IP67 water resistant design
- 12V only
- 0.2" x 0.5" [5.1 x 12.7mm]
- Mounting track available

shadow-net® TECHNOLOGY ENABLED

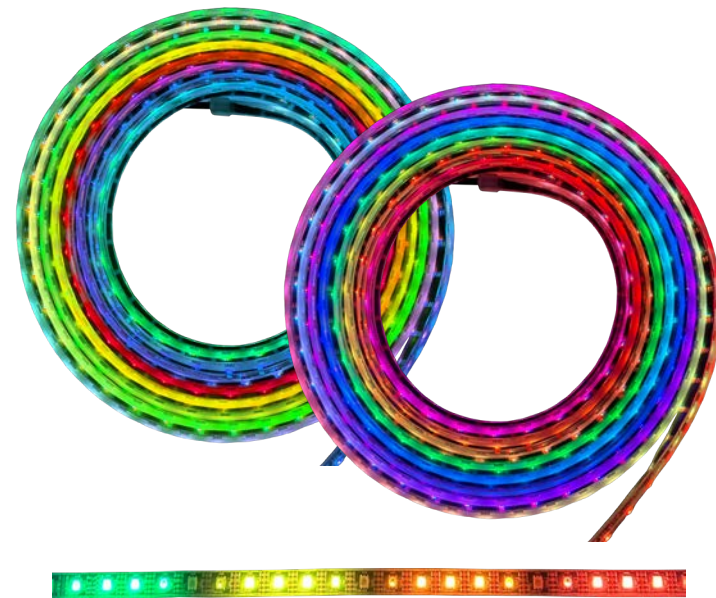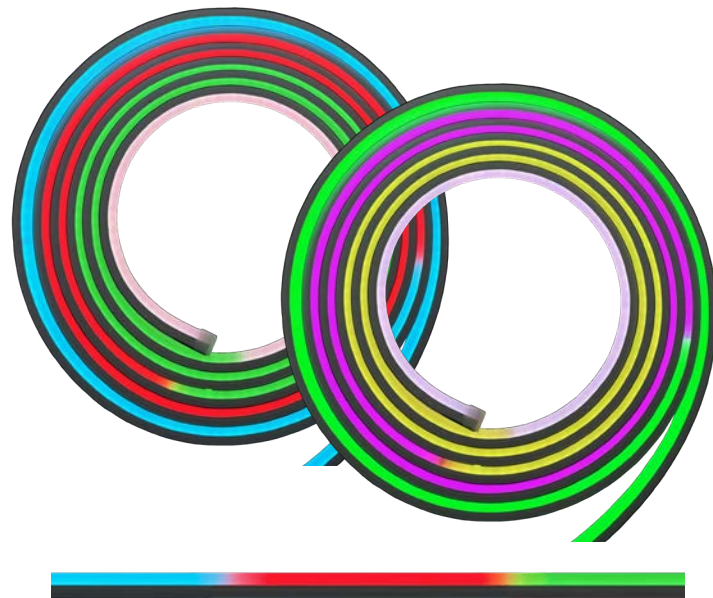*shadow-net® TECHNOLOGY ENABLED*

DIGITAL LIGHTING CONTROLLER

SCM-DLC

The SCM-DLC Digital Light Controller is engineered to integrate seamlessly between Shadow-Caster® Lighting Controls and the latest digital LED light strips to create distinctive and customizable lighting displays.

Craft intricate lighting patterns, dynamic effects, and captivating sequences that will not just illuminate but animate your vessel.

SCM-DLC TYPICAL WIRING

MFD

Light Commander

10-30V

Shadow-NET®

SCM-DLC

12V

SCM-DAL

SCM-DLC
- Up to 15A of digital lighting control
- Supports WS and SPI standards
- Backlit SC logo indicates color, brightness or fault
- Digital overcurrent protection
- IP67 sealed housing
- Deutsch IP67 rated connections
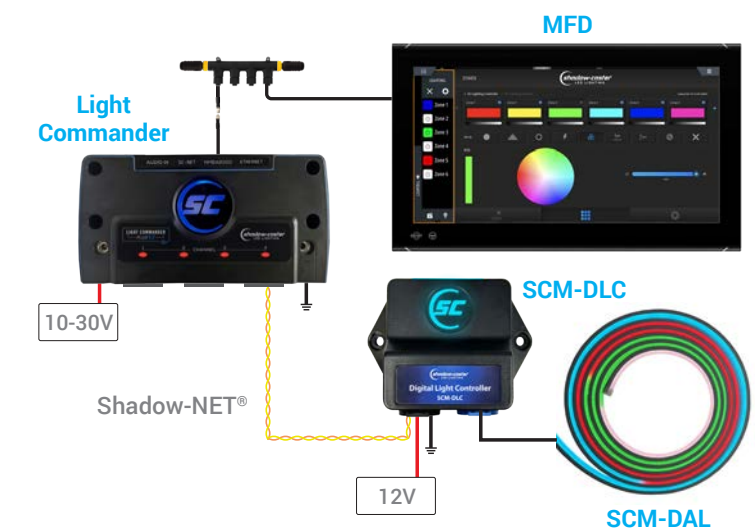
- Shadow-NET® enabled
- Field programmable and compatible with Shadow-Caster® Light Commander N2K series
- Use standalone or with Shadow-NET®
- 3.465" x 2.852" x 1.205" [88 x 72.4 x 30.6mm]

shadow-net® TECHNOLOGY ENABLED

CONTROLLERS

LIGHT COMMANDER
NMEA 2000 MULTI-ZONE LIGHTING CONTROLLER

LIGHT COMMANDER N2K
NMEA 2000 Light Controller and
Expansion Module

LIGHT COMMANDER N2K PLUS V2
NMEA 2000, Ethernet and
Mobile Connectivity

LIGHT COMMANDER

The Shadow-Caster® Light Commander is an NMEA 2000 connected lighting controller based on the newly published NMEA 2000 lighting control standards.

Utilization of NMEA 2000 lighting standards enable "next level" implementation of lighting control and marine system integration and system interoperability.

The expandable Light Commander multi-zone lighting controller supports up to 6 zones of lighting per module with native support for 4 zones of RGB or RGBW lights and unlimited Shadow-NET® devices.

The lighting controller supports programs including multiple color fade, music sync and color rotation.

- NMEA 2000 backbone on all models
- MFD network port connectivity (SCM-LC-N2K-PLUS and SCM-LC-N2K-PLUS-V2 models)
- WiFi interface (SCM-LC-N2K-PLUS-V2 model only)
- IP67 water resistant housing with Deutsch connections
- All in one design, no need for a separate MFD communication bridge (SCM-LC-N2K-PLUS-V2)
- Up to 6 separate zones of lighting control - expandable to 18 zones by connecting multiple units
- 6 "Instant ON" switch inputs for enabling lights without MFD control
- Support for RGB and RGBW lighting

COMPATIBLE WITH LEADING MFD BRANDS

INTERFACING TO THE LIGHT COMMANDER SERIES

NMEA 2000
Direct NMEA 2000 connectivity.

Check with your MFD manufacturer to verify support.

SCM-LC-N2K or SCM-LC-N2K-PLUS-V2

PUSH BUTTON CONTROL FOR 6 ZONES
Push button control for 6 zones via momentary switch.

- Press for ON/OFF
- Press and hold to dim

SCM-LC-N2K or SCM-LC-N2K-PLUS-V2

NETWORK INTERFACE
Direct network connectivity, supported by most MFD manufacturers.

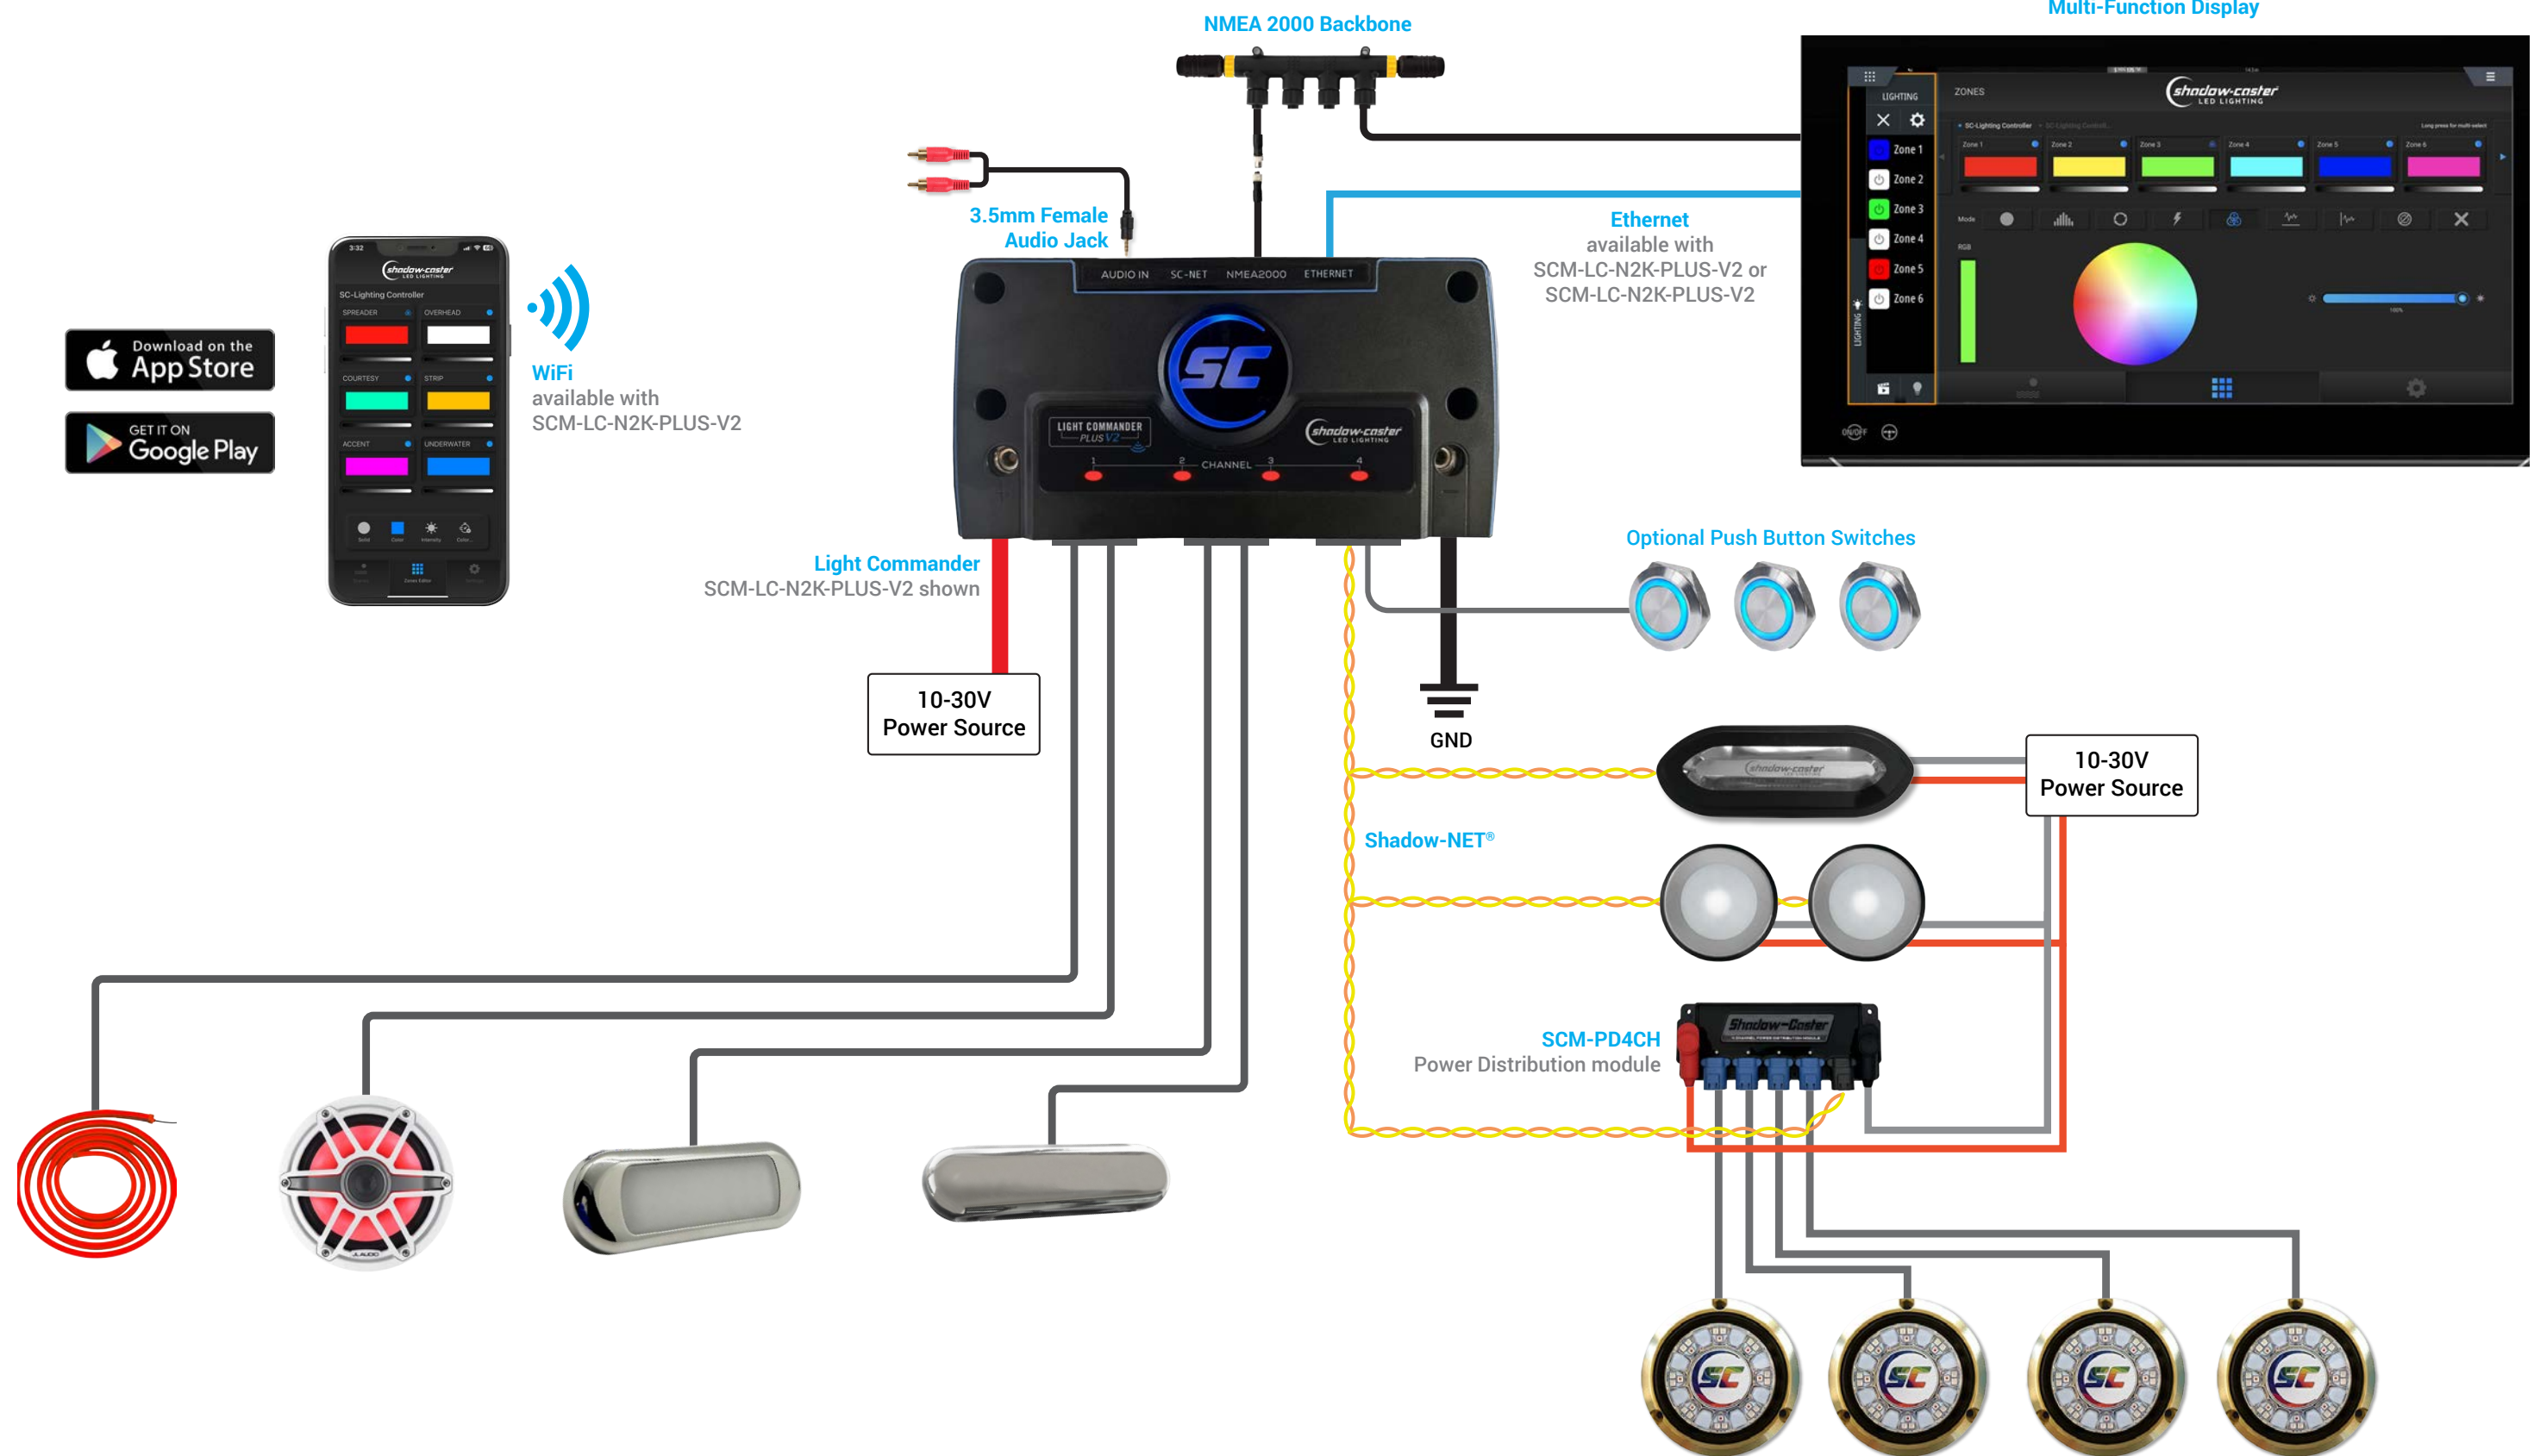*SCM-LC-N2K-PLUS or SCM-LC-N2K-PLUS-V2*

MOBILE CONNECTIVITY
WiFi interface supported on Android and iOS platforms

SCM-LC-N2K-PLUS-V2

CONTROLLERS

SCM-LC-N2K TYPICAL WIRING

NMEA 2000 Backbone

Multi-Function Display

3.5mm Female Audio Jack

Ethernet
available with
SCM-LC-N2K-PLUS-V2 or
SCM-LC-N2K-PLUS-V2

WiFi
available with
SCM-LC-N2K-PLUS-V2

Download on the **App Store**

GET IT ON **Google Play**

AUDIO IN   SC-NET   NMEA2000   ETHERNET

LIGHT COMMANDER PLUS V2

shadow-caster LED LIGHTING

1   2   CHANNEL   3   4

Light Commander
SCM-LC-N2K-PLUS-V2 shown

Optional Push Button Switches

10-30V
Power Source

GND

10-30V
Power Source

Shadow-NET®

SCM-PD4CH
Power Distribution module

CONTROLLERS

SCM-ZC-KIT

The Multi-Zone Lighting Control Kit SCM-ZC-KIT provides a simple and convenient lighting control with full Shadow-NET® functionality.

The kit includes the SCM-ZC-REMOTE and the SCM-MZ-LC.

- RGB, RGBW, 2 color and single color lighting
- Zone control (for multi-zone applications only)
- Multiple fade mode changes
- Brightness in each zone
- 3 versions of music sync
- Control transition speed, color sequence for multiple fade and strobe modes

SCM-SZ-RGB

The Shadow-Caster® Single Zone Lighting Controller is a low cost, marine grade RGBW LED controller that can be operated from a standard push button switch to set color and brightness.

A built-in Shadow-NET® interface allows the controller to synchronize color and brightness control with other Shadow-NET® devices, for example; to make Shadow-Caster® underwater lights match the color of interior RGBW lighting.

SCM-ZC-KIT INCLUDES:

SCM-ZC-REMOTE
- Easy to connect 4-conductor wiring harness
- 16 back-lit tactile push buttons
- IP65 water resistant
- Outside diameter 3.625" [92mm]
- Depth 0.5" [13mm]
- Mounting hole 3" [76mm]

SCM-MZ-LC
- 4 individually fused 15 amp RGBW lighting connections
- Compatible with 12/24 volt systems
- 3.5mm female audio connection for music sync input
- IP65 washdown rated enclosure
- Shadow-NET® Enabled
- 7.5" x 3.5" [197 x 89mm]

SCM-SZ-RGB
- 10 Amps of RGBW support
- IP67 housing and connector
- 12V/ 24V operation compatible
- Backlit SC logo indicates color, brightness or fault
- Auto-detect for white channel
- Integrated overcurrent protection
- Operate from an ON/OFF/momentary switch or a single momentary push button or Light Commander N2K series
- Use the expansion module (SCM-RGB-EXP) to provide expanded RGBW capacity
- Shadow-NET® Enabled
- 3.465" x 2.852" x 1.205" [88 x 72.4 x 30.6mm]

SCM-RGB-EXP
- RGBW expansion module to add more RGBW capacity
- Specifications are the same as the SCM-SZ-RGB

POWER DISTRIBUTION

SCM-PD4CH

The SCM-PD4CH is a 4-position power distribution module that provides a convenient way to connect and power up to four Shadow-Caster® underwater lights.

SCM-PWR6

The SCM-PWR6 is a 6 channel digital switch module to interface any standard light with the Shadow-Caster® Shadow-NET® interface.

SCM-PD4CH

The SCM-PD4CH provides a convenient way to power and protect up to 4 Shadow-Caster® underwater lights.

- Compact remote power control box
- Green/red LED indicates the status of each output channel
- Individual digital overcurrent protection for each channel
- Compatible with Shadow-Caster® single and multi-color lights
- Recommended when installing two or more underwater lights
- Use with a helm mounted switch or with no switch when using compatible Shadow-Caster® controller
- Blue back light Shadow-Caster® logo panel indicates power state
- IP67 Deutsch connections

7.9" [200.7mm]

2.4" [61mm]

1.3" [33mm]

SCM-PWR6

The SCM-PWR6 is designed to allow control of simple ON/OFF and other 3rd party Lights as part of a "Lighting Scene" through the Shadow-Caster® interface.

- 6 independent digital switches
- Control 3rd party lighting
- Digital over current protection
- Manual switch override
- Full integration with Shadow-NET® interface
- Blue back light Shadow-Caster® logo panel indicates power state

7.9" [200.7mm]

2.4" [61mm]

1.3" [33mm]

ACCESSORIES

MOMENTARY SWITCH	
SCM-SWITCH-O/O/M	OFF/ON/MOMENTARY Rocker switch with Shadow-Caster logo

| ACCENT LIGHTING MOUNTING TRACK	
SCM-AL-TRACK-1M	AL LED Track
SCM-AL-MINI-TRACK-1M	Mini Neon Track
SCM-AL-SVMINI-NEON-TRACK-1M	SV Mini Neon Track

SCM-AL-TRACK-1M   SCM-AL-MINI-TRACK-1M   SCM-AL-SVMINI-NEON-TRACK-1M

| GASKETS	
SCM-GASKET-SCR	SCR Gasket for metal hulls
SCM-GASKET-SCM4	SCM 4 Gasket for metal hulls
SCM-GASKET-SCM6	SCM 6 Gasket for metal hulls
SCM-GASKET-SCM10	SCM 10 Gasket for metal hulls
SCM-GASKET-SC3TB	SC3 Thru-Bolt Gasket for metal hulls
SCM-GASKET-SC3SM	SC3 AL Surface Mount Gasket for metal hulls
SCM-GASKET-SC3SM-BR	SC3 Bronze Gasket for metal hulls

Mounting Surface
Mounting Screws
Gasket
Underwater Light
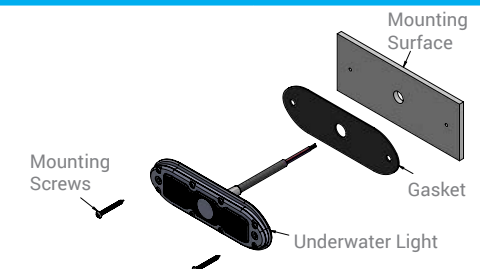
TRIM TAB MOUNTS	
SCR-TT	Single Trim Tab Mount for SCR series
SCM-TT-10	Single Trim Tab Mount for SCM-10
SCM-TT-6	Single Trim Tab Mount for SCM-6
SCM-TT-4	Single Trim Tab Mount for SCM-4

DOCK LIGHT	
SCM-DOCKMOUNT	SCR underwater light with secure dock mounting attachment

CABLES	
SCM-MFD-CABLE-GARMIN	Garmin IP67 ethernet cable
SCM-MFD-CABLE-NAVICO	Simrad, Lowrance, B&G IP67 ethernet cable
SCM-MFD-CABLE-STANDARD	IP67 ethernet cable
SCM-LC-HARNESS-KIT	D Style pre-wired connectors (for SCM-LC-N2K or PLUS)
SCM-SCNET-01	1m Shadow-NET® cable
SCM-SCNET-02	2m Shadow-NET® cable
SCM-SCNET-04	4m Shadow-NET® cable
SCM-SCNET-05	5m Shadow-NET® cable
SCM-SCNET-Y	0.5 meter Shadow-NET® splitter (2 male to 1 female)
SCM-SCNET-MMCOUPLER-0.5	Shadow-NET® cable male to male coupler

| WIRE (AVAILABLE BY THE FOOT)	
SCM-SCNET-OYTP20G-50	Orange & yellow wire: 20awg twisted pair, 50ft (15m)
SCM-SCNET-OYTP20G-100	Orange & yellow wire: 20awg twisted pair, 100ft (30.5m)
SCM-SCNET-RBOY-50	4 conductor wire: 16awg red & black, 20awg orange & yellow, black outer jacket, 50ft (15m)
SCM-SCNET-RBOY-100	4 conductor wire: 16awg red & black, 20awg orange & yellow, black outer jacket, 100ft (30.5m)
SCM-SCNET-RGB18G-50	4 conductor wire: 18awg, red, green, blue, black with black outer jacket, 50ft (15m)
SCM-SCNET-RGB18G-100	4 conductor wire: 18awg, red, green, blue, black with black outer jacket, 100ft (30.5m)

SHADOW-CASTER LIGHTING COLOR CODES

- ⚪ GW - Great White
- ⚪ CW - Cool White
- 🟡 WW - Warm White
- 🟣 UB - Ultra Blue
- 🟢 AG - Aqua Green
- 🔵 BB - Bimini Blue
- 🔴 CR - Cool Red
- 🔵 BW - Blue/White
- 🔵 WBR - White/Blue/Red
- 🌈 CC - Color Changing (RGB / RGB / RGBW)

**Designed & Manufactured
in Clearwater, Florida, USA**

VISIT US ONLINE
for product details, support, to find a dealer and more
WWW.SHADOW-CASTER.COM

Shadow-Caster LED Lighting, 2060 Calumet Street, Clearwater, FL 33765
p: +1 (727) 474 2877 **e:** info@shadow-caster.com **w:** www.shadow-caster.com